



L.E. Johnson Products, Inc.
 2100 Sterling Ave.
 Elkhart, IN 46516
 Ph: (574) 293-5664
 Fax: (574) 294-4697
 info@johnsonhardware.com
 www.johnsonhardware.com




1500SC

Commercial Grade Soft-Open/Close Pocket Door Frame
 for 1" to 1 3/4" Thick Door to 200 lbs. (2" x 4" Stud Wall)



SOFT-Close/Open

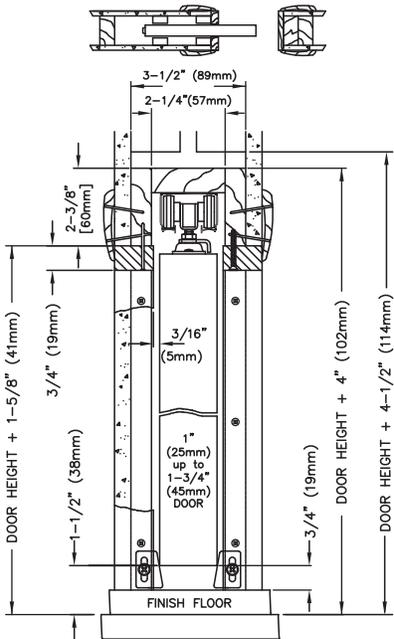

THE SPACE SAVER

An easily assembled, structurally strong pocket door frame. Designed for the builder or do-it-yourselfer. Provides a space saving opportunity while still assuring privacy. Pocket doors do not need "swing" room to save valuable floor space.



Available for all standard doors from 2/0 X 6/8 to 5/0 X 9/0 or an all-purpose frame that can be cut down for any smaller sized door.

1500SC Pocket Door Frame Features

STRONG ALL-STEEL STIFFENERS

Split jamb and stud uprights now all-steel to provide maximum rigidity for wall material, will not warp and restricts nails from penetration into pocket. Self tapping drywall and trim screws included.

SELF-ADJUSTING FLOOR ANCHORS

Long vertical fingers slide into split studs. This allows for settling of floor without disturbing horizontal alignment of and header and track. Plates can be nailed or cemented to floor.


REMOVABLE TRACK

Track has keyhole slots for easy removal without tearing out walls. Box design prevents rollers from jumping track. Convex rails provide one-point wheel contact for smoothness and dirt traps for free rolling.

SOFT-CLOSE/OPEN TRICYCLE HANGERS

Pre-Installed Soft Close hangers allow for soft open and close in both directions. Tri-design insures all wheels carry weight equally. Smooth rolling, balanced ball-bearing wheels ride with minimum friction on convex track rails. A "flip-of-a-clip" separates hangers from doors for easy door removal. The 1500SC uses a 1" diameter wheel.

Track and Hardware Components

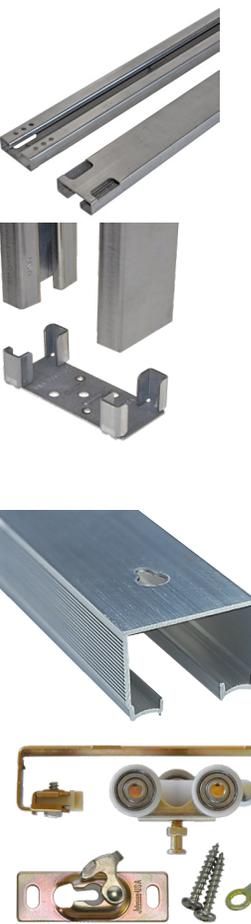





Cutting Instructions-Johnson Hardware Pocket Door Frame Header

1500 Johnson Pocket Door Frames are marked for cutting to shorter lengths. See cutting instructions below.


- 1** Remove Adjustable End Bracket.
- 2/8 = 32" [81cm]
 - 2/6 = 30" [76cm]
 - 2/4 = 28" [71cm]
 - 2/0 = 24" [61cm]

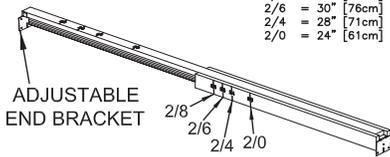


2 Cut through WOOD part of header only, on desired door size marking.

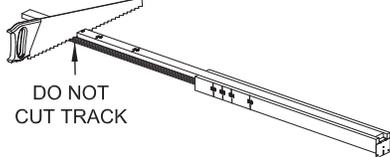


3 Turn Header over and cut Track 1-3/8" (19mm) shorter than wood Header.

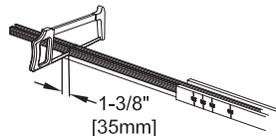


4 Replace Adjustable End Bracket on new cut end of header.



5 Turn Header on side and cut 3/4" (19mm) Head Trim Board ONLY at proper mark. Remove cut off end and discard.

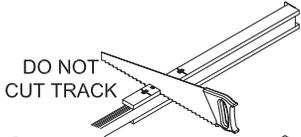

6 Turn Header and cut off other side.



Pocket Door Accessories

1511 Clear Pine Jamb Kit/ 1510 Finger Joint Primed Jamb Kit



1521 Privacy Lock


1555 Converging Door Kit

150 Edge Pull

1515 Plywood Reinforcement Clip-Set


L.E. Johnson Products, Inc.

Installation Instructions Johnson Hardware Pocket Door Frame Header

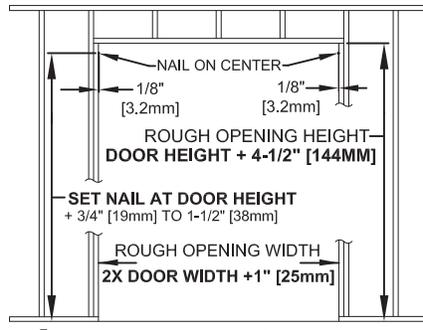


1 Header must be SQUARE and PLUMB with studs and LEVEL.


Mark each side jamb and drive a flat head nail on centerline, leaving 1/8" (3.2mm) protruding. (Frame header end plates will rest on these nails.)

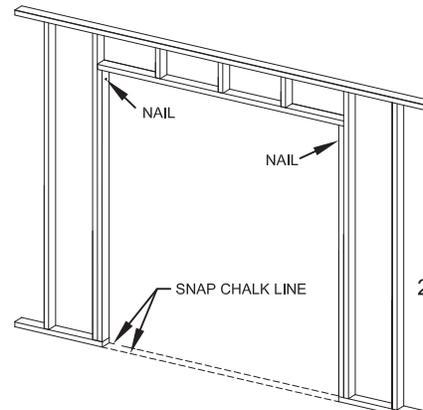

2 Snap two chalk lines on floor even with side jamba as shown.

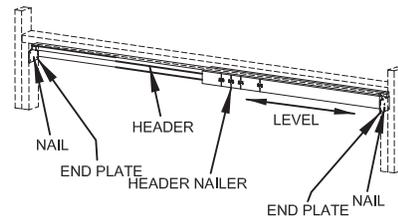


3 Slip slots in Frame Header End Plates over nails in side jamba.

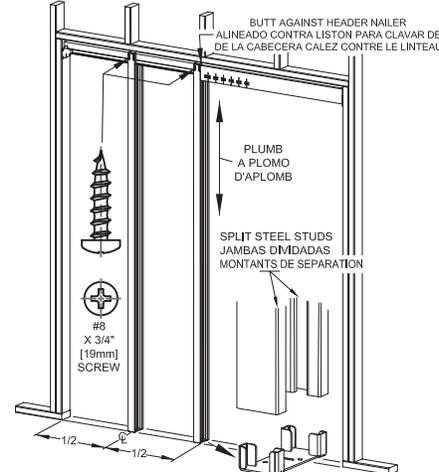



4 Slip fingers on floor Plates into the reinforcing strips of Split Steel Studs as shown. Butt Split Steel Studs against header nailer strips and screw in place.




5 Seal all edges and face of door panel with paint or sealing stain.



6 Fasten 1513 Bumper on back edge of door 40" (1m) from bottom edge.

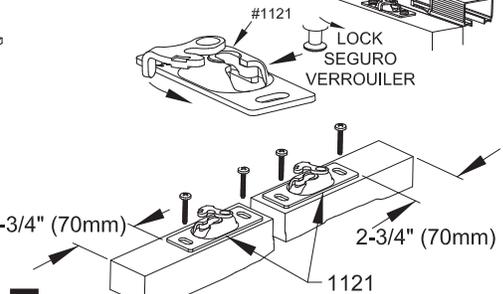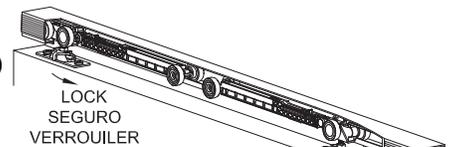

7 Attach door plate 1121 to top of door 2-3/4" (70mm) from each edge with locking tabs on same side. Insert hanger 1060 onto track. Mount door by locating door plate 1121 under adjusting bolt of 1060. Lift door and push bolt into door plate. Lock locking tab.

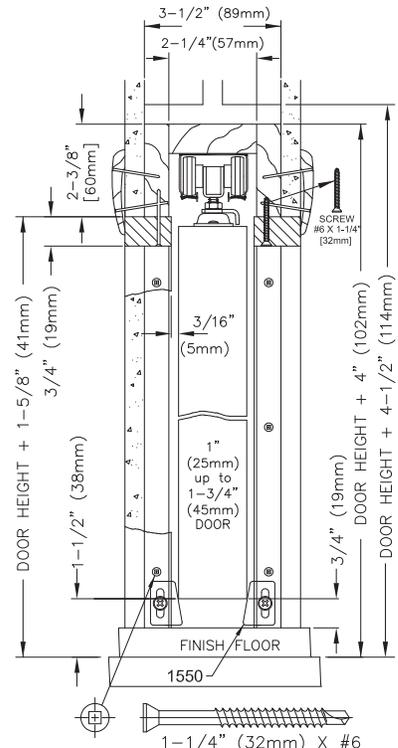

8 Fasten #1550 Guides on finished split jamba at door bottom so door is held in center of opening without binding.

2100 Sterling Ave.

Elkhart, IN 46516 USA

(574) 293-5664 Rev 06/19