




L.E. Johnson Products, Inc.  
 2100 Sterling Ave.  
 Elkhart, IN 46516  
 Ph: (574) 293-5664  
 Fax: (574) 294-4697  
 info@johnsonhardware.com  
 www.johnsonhardware.com



**1560**

Commercial Grade Pocket Door Frame  
 for 1" to 3" Thick Door to 200 lbs. (2" x 6" Stud Wall)

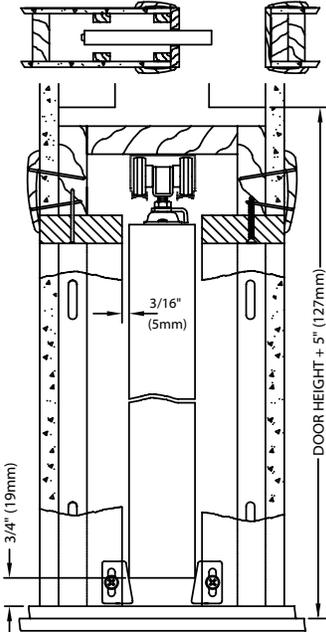

**THE SPACE SAVER**

An easily assembled, structurally strong pocket door frame. Designed for the builder or do-it-yourselfer. Provides a space saving opportunity while still assuring privacy. Pocket doors do not need "swing" room to save valuable floor space.



Frames available for doors from 2/6 X 6/8 up to 5/0 X 9/0. All 2/6 and 3/0 headers are marked for cutting to smaller, standard size widths. Available in 2/6, 3/0, 4/0, 5/0 widths and 6/8, 7/0, 8/0, 9/0 heights.

**1560 Pocket Door Frame Features**  
**STRONG STIFFENERS**

Split jamb and stud uprights have full steel sides and backs to provide maximum rigidity for wall material and restricts nails from penetration into pocket. Slots allow room for easy nailing of trim stops.

**SELF-ADJUSTING FLOOR ANCHORS**

Long vertical fingers slide into split studs. This allows for settling of floor without disturbing horizontal alignment of and header and track. Plates can be nailed or cemented to floor. The 1560 utilizes a wider floor anchor to accommodate 2 X 6 studs.


**REMOVABLE TRACK**

Track has keyhole slots for easy removal without tearing out walls. Box design prevents rollers from jumping track. Convex rails provide one-point wheel contact for smoothness and dirt traps for free rolling.

**TRICYCLE HANGERS**

Tri-design insures all wheels carry weight equally. Smooth rolling, balanced wheels ride with minimum friction on convex track rails. A "flip-of-a-clip" separates hangers from doors for easy door removal. The 1560 uses a 1" diameter ball-bearing wheel.

Track and Hardware Components



Compatible with optional 1060 Soft Close Assembly



See online at: [www.johnsonhardware.com/1560.htm](http://www.johnsonhardware.com/1560.htm)







### Cutting Instructions-Johnson Hardware Pocket Door Frame Header

1560 Johnson Pocket Door Frames are marked for cutting to shorter lengths. See cutting instructions below.


**1** Remove Adjustable End Bracket.

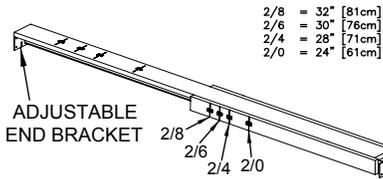


**2** Cut through WOOD part of header only, on desired door size marking.

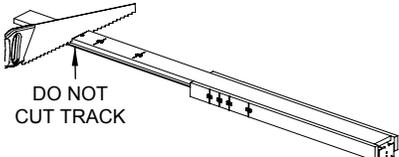

**3** Turn Header over and cut Track 1-3/8" (19mm) shorter than wood Header.




**4** Replace Adjustable End Bracket on new cut end of header.



**5** Turn Header on side and cut 3/4" (19mm) Head Trim Board ONLY at proper mark. Remove cut off end and discard.



**6** Turn Header and cut off other side.




### Pocket Door Accessories




### Installation Instructions

#### Johnson Hardware Pocket Door Frame Header

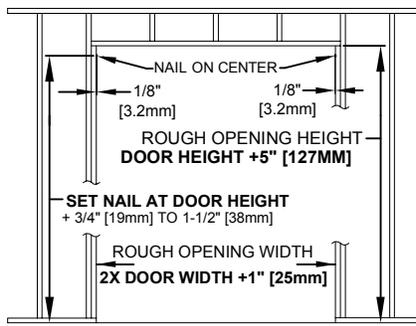


**1** Header must be SQUARE and PLUMB with studs and LEVEL.


Mark each side jamb and drive a flat head nail on centerline, leaving 1/8" (3.2mm) protruding. (Frame header end plates will rest on these nails.)

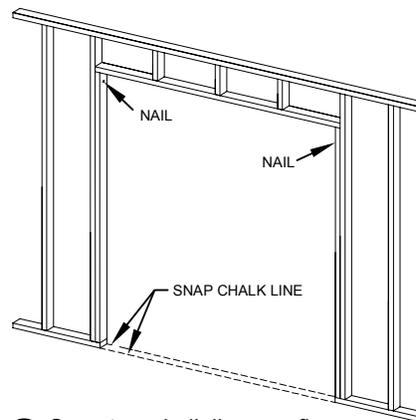


**2** Snap two chalk lines on floor even with side jambs as shown.

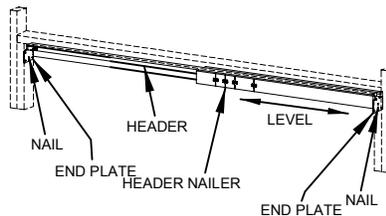


**3** Slip slots in Frame Header End Plates over nails in side jambs.

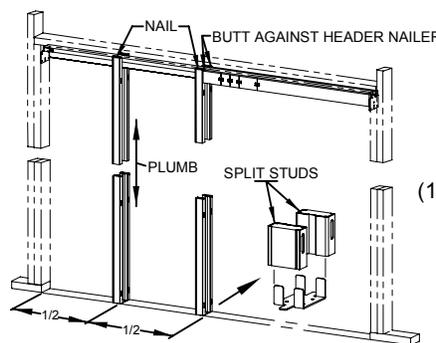


**4** Slip fingers on floor Plates into the reinforcing strips of Split Studs as shown. Butt Split Studs against header nailer strips and nail in place.




**5** Seal all edges and face of door panel with paint or sealing stain.

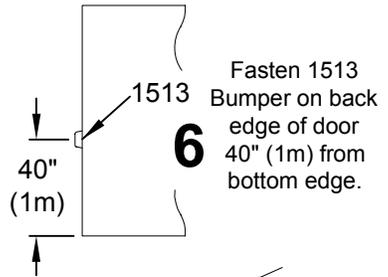

**6** Fasten 1513 Bumper on back edge of door 40" (1m) from bottom edge.

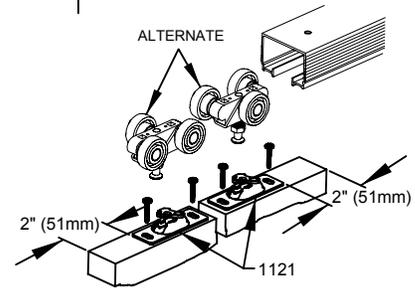

**7** Attach door plate 1121 to top of door 2" (50mm) from each edge with locking tabs on same side. Insert hanger 1125 onto track. Mount door by locating door plate 1121 under adjusting bolt of 1125. Lift door and push bolt into door plate. Lock locking tab.

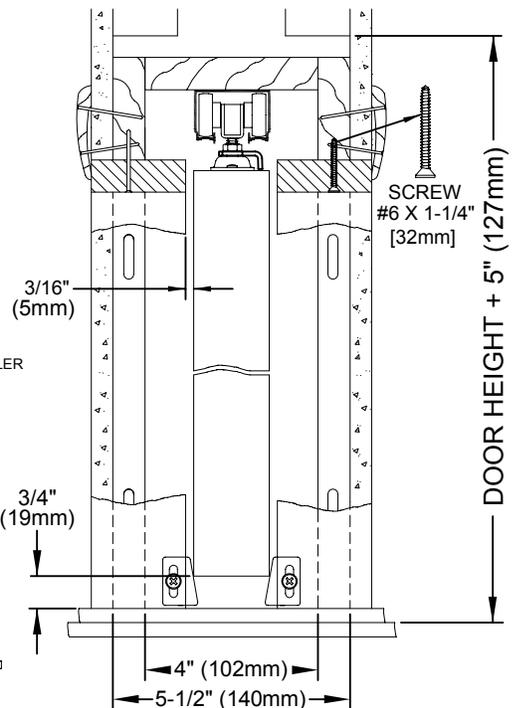

**8** Fasten #1550 Guides on finished split jambs at door bottom so door is held in center of opening without binding.