

## **OPEN UP ROOMS, CREATE MORE PRIVATE SPACE**

Where a "traditional" door would use up too much space, pocket doors "fit right in" to solve room-planning problems. You get more usable space, more flexibility and better appearance.

**Conventional Door** 




Johnson Pocket Door





## SIMPLIFY ACCESS AND ENHANCE ENTRIES

Unlike an old-fashioned door-in-thewall, Johnson's pocket door system *cannot stick or come off its track.* And, installation is surprisingly easy. Even a moderately skilled worker can install one in about 15 minutes, using just a few basic tools. When a square foot of housing can cost up to \$150, a pocket door brings extra value by increasing the usable space around the doorway (8-10 extra square feet at a potential value of \$1,200 - \$1,500). That's space for a microwave stand, bookcase, decorative accessory and dozens of other uses.

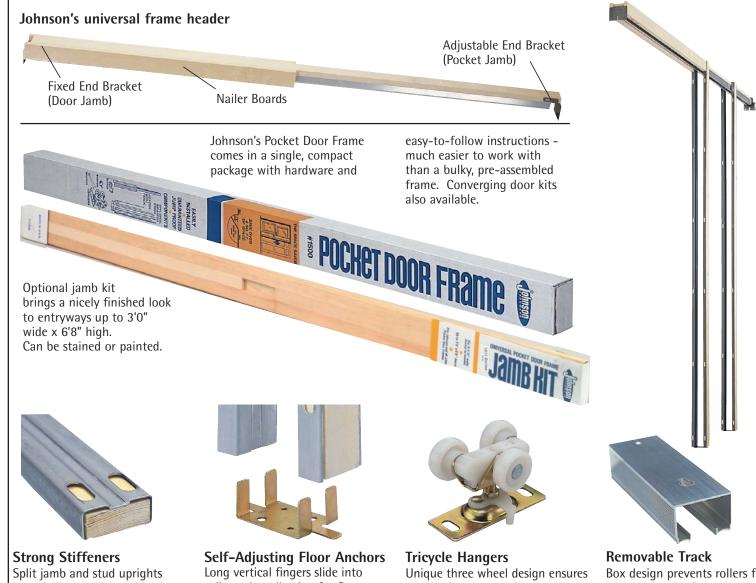

have full steel sides and backs to give maximum rigidity for wall material and to restrict accidental nail penetration. Slots allow easy nailing of trim stops.



settling without disturbing horizontal alignment of header and track. Anchors can be nailed, screwed or cemented to floor.

all wheels carry weight equally. Smooth rolling balanced wheels have minimum friction riding on convex track rails. "Flip-of-a-clip"

separates wheels from doorplate

for easy door removal.

Box design prevents rollers from jumping track. Convex rails have one-point roller contact for the smoothest possible rolling and to trap friction-causing dust away from contact area. Track's keyhole slots allow easy removal without tearing out walls.

## **GUARANTEED QUALITY**

How can Johnson give a Lifetime Guarantee to its pocket door systems? Unique design, quality components and ease-of-assembly all add up to smooth operation for years to come.

"One thing I like about Johnson Pocket Doors is I never have to go back and fix them." Brian Brensier.

Art Stauffer Builders




THE SECRET TO EASY INSTALLATION: THE JOHNSON HARDWARE® EXCLUSIVE DESIGN

## Measure Door Width and Construct Rough Opening

### **Rough Opening Size Chart**

For 1–1/8" to 1–3/4"**	Rough Opening
Doors	Width x Height
2'0" x 6'8"	49" x 84-1/2"
2'4" x 6'8"	57" x 84-1/2"
*2'6" x 6'8"	61" x 84-1/2"
2'8" x 6'8"	65" x 84-1/2"
*3'0" x 6'8"	73" x 84-1/2"


\*All purpose-marked for cutting to other standard widths. \*\*1575 ppk3 1-3/4" adaptor required.

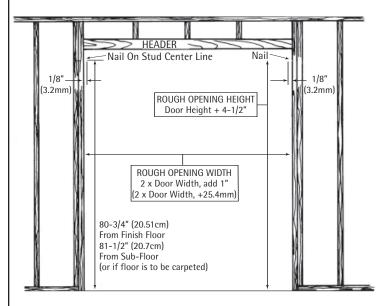


## 1

Header must be **SQUARE** and **PLUMB** with studs and **LEVEL**.

Mark each side of jamb and drive a flat head nail on centerline, leaving 1/8" (3.2mm) protruding. (Frame header end plates will rest on these nails.)

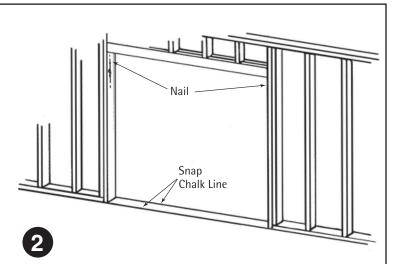


Snap two chalk lines on floor even with side jambs as shown.

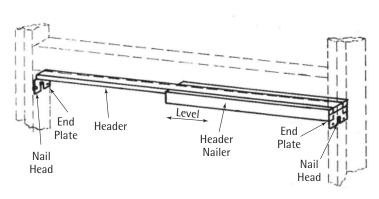




Slip slots in Frame Header End Plates over nails in side jambs.

#### THE SECRET TO EASY INSTALLATION: THE JOHNSON HARDWARE® EXCLUSIVE DESIGN

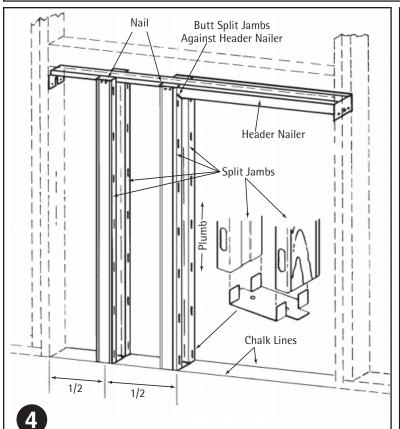


Slip fingers on Floor Plates into the reinforcing strips of Split Jambs as shown. Butt split jambs against header nailer strips and nail into place.




Apply desired wall materials over the pocket side and above the door opening. Wall materials are brought clear to the edges of the opening.

5

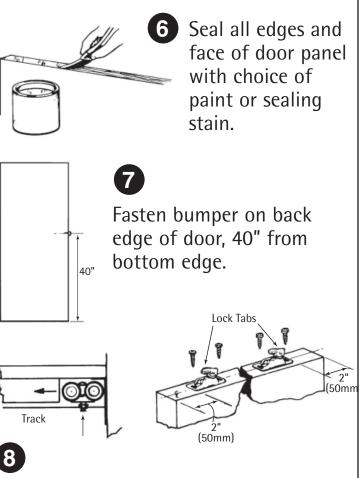


Insert hanger wheels into track through space between end plate and track. Fasten hanger plates in place.



– Insert Pin Into Slot – Lock Tab

Hold door in opening and slip pivot pin into slot in plate. Lock in place with locking tab. Adjust hangers for height and plumb with jambs.

THE SECRET TO EASY INSTALLATION: THE JOHNSON HARDWARE® EXCLUSIVE DESIGN

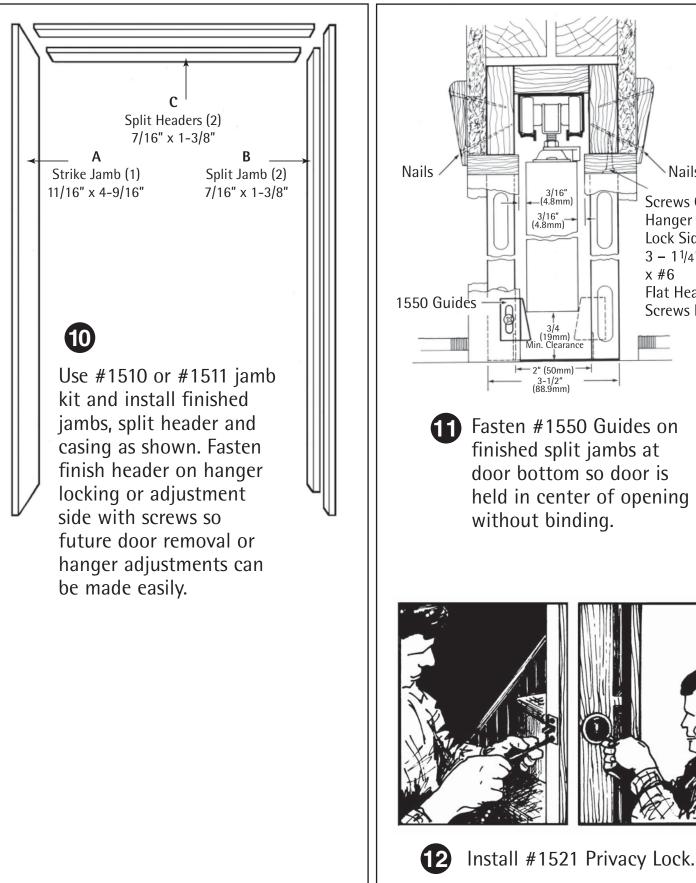



Nails

Screws On

 $3 - 1^{1/4}$ " (32mm)

**Screws Provided** 

Hanger Lock Side


x #6 Flat Head

THTT:

THE SECRET TO EASY INSTALLATION: THE JOHNSON HARDWARE® EXCLUSIVE DESIGN

### Cutting Instructions— Johnson Hardware<sup>®</sup> Pocket Door Frame Header

2'6" (76.2cm) and 3'0" (91.4cm) Universal Johnson Pocket Door Frames are marked for cutting to shorter lengths. See cutting instructions below.



Cut through WOOD part of header only, on desired door size marking.

3

Turn Header over and cut Track 1 3/8" (35mm) shorter than wood Header.





4

Replace Adjustable End Bracket on new cut end of header.

5 Turn Header on side and cut 3/4" (19mm) Head Trim Board ONLY at proper mark. Remove cut off end and discard.



# Pocket Door Accessories For The Perfect Finishing Touch









150 EDGE PULL Retractable Pull, handy for pulling door from pocket.

A few of the extensive line of Johnson pulls available from your dealer.

RECTANGULAR

1575 1-3/4" ADAPTOR KIT Greater clearance inside Frames when using 1-3/4" (44.5mm) thick doors.

1555 CONVERGING DOOR KIT For connecting 2 Pocket Door Frames together.

> 1510 / 1511 JAMB KIT Finger joint, clear pine, for doors up to 3'0" x 6'8".

**Johnson** HARDWARE

Engineered Excellence

2100 Sterling Avenue • Elkhart, IN 46516 Phone: 1-574-293-5664 www.johnsonhardware.com

6

